


PLATFORM ROOF BASKET SPECIAL FOR FJ CRUISER INSTALLATION INSTRUCTIONS




1. Install corners and connect the corners to the frame.

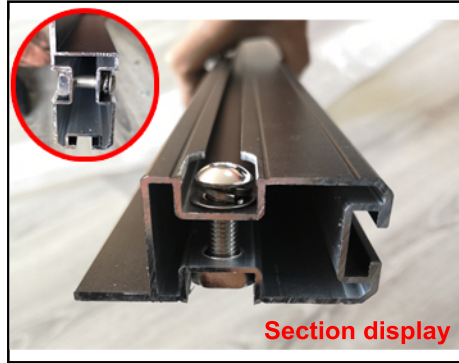


2. Pass the screw through the hole of the side beam, use a wrench to penetrate it to another hole, and hold it with a square nut, and finally use a wrench to tighten the screw.



3. Assemble the other three corners in turn.

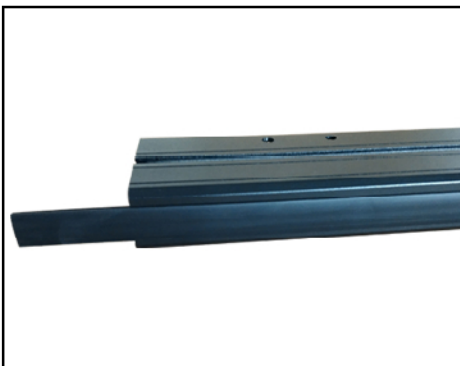


4. Slide one long rubber into front groove of the foremost platform tube.

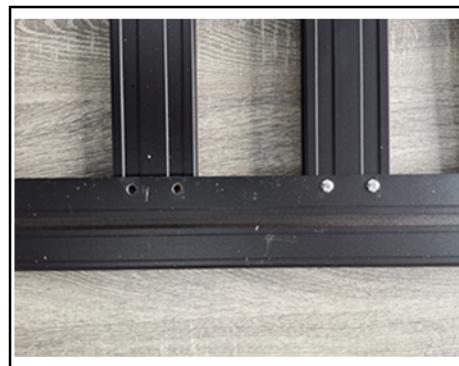

5. Install the bottom plate, match the bottom plate to the hole of the frame, and fix it with screws.




6. The installation is complete.

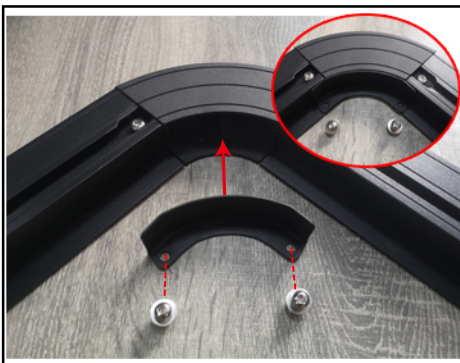


7. As shown in the picture, to install the corner reinforcement accessories, you need to perforate and install.



8. FF Bracket in front side, FM bracket in middle side, FR bracket in rear side.

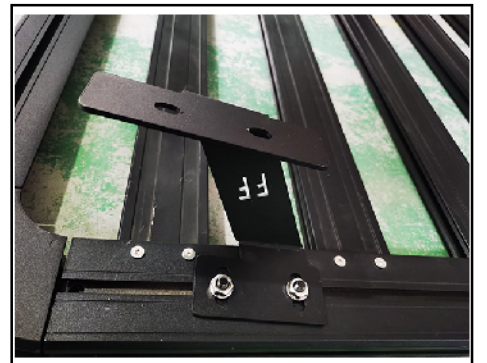

9. Use T-bolt to attach each bracket to the platform as shown.

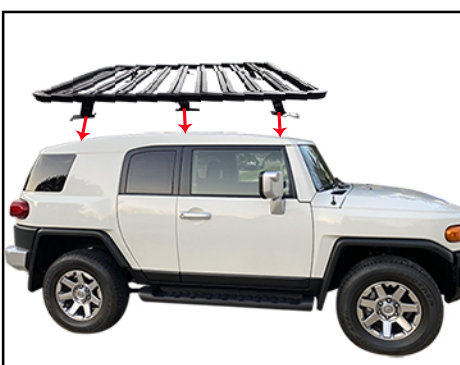

10. Align the bracket's holes with the car roof original holes, and lock it tightly.